



NOVUX[®]

Hardened Terminals

A modular ecosystem that's easily
configurable and scalable

COMMScope[®]

NOVUX[®] is the natural evolution of today's products—made better



When we set out to design our new NOVUX fiber-to-the-X (FTTX) ecosystem, we listened carefully to our customers. You told us that solutions must deliver the agility to evolve quickly while providing the flexibility to work seamlessly with any field application. We also learned you need solutions that deliver reliability today—and decades from now—so that you can realize your goals and keep pace with the rapidly changing network environment.

75% fewer components than existing products

DELIVER

50X the number of configurations available today

The NOVUX hardened terminals advantage

Configurable. Scalable. Simple.

Widest variety of technologies available from a single platform

- Single- and multi-fiber, splitters, optical tap, fiber indexing, and on-demand hybrid configurations

Application flexibility for new builds and upgrades

- Extended choice of cable types and sizes; stubless configurations
- Choice of full-size or Prodigy[®] single fiber ports, multi-fiber HMFOC jacks
- Minimized footprint for optimal port count and terminal size
- Black and gray colors for ease of concealment
- Multi-use functionality

Ready for the field workforce of the future

- Unique network identification with ID plate and QR code
- Uniform installation practices and documentation speeds cross-training
- Digital access to all product information powered by CommScope cTrak[®] app

Agile global supply chain backed by common platform design and processes

- Multiple global locations with local manufacturing advantage
- Industry-renowned local field expertise and support

NOVUX hardened terminals

UP TO 50%
smaller*

*compared to existing MST terminals with
universal mounting bracket



MST 8-port




NOVUX HST 8-port



Prodigy 8-port

NOVUX hardened terminals are engineered from the get-go as a new FTTX system architecture that spans the outside plant fiber network.

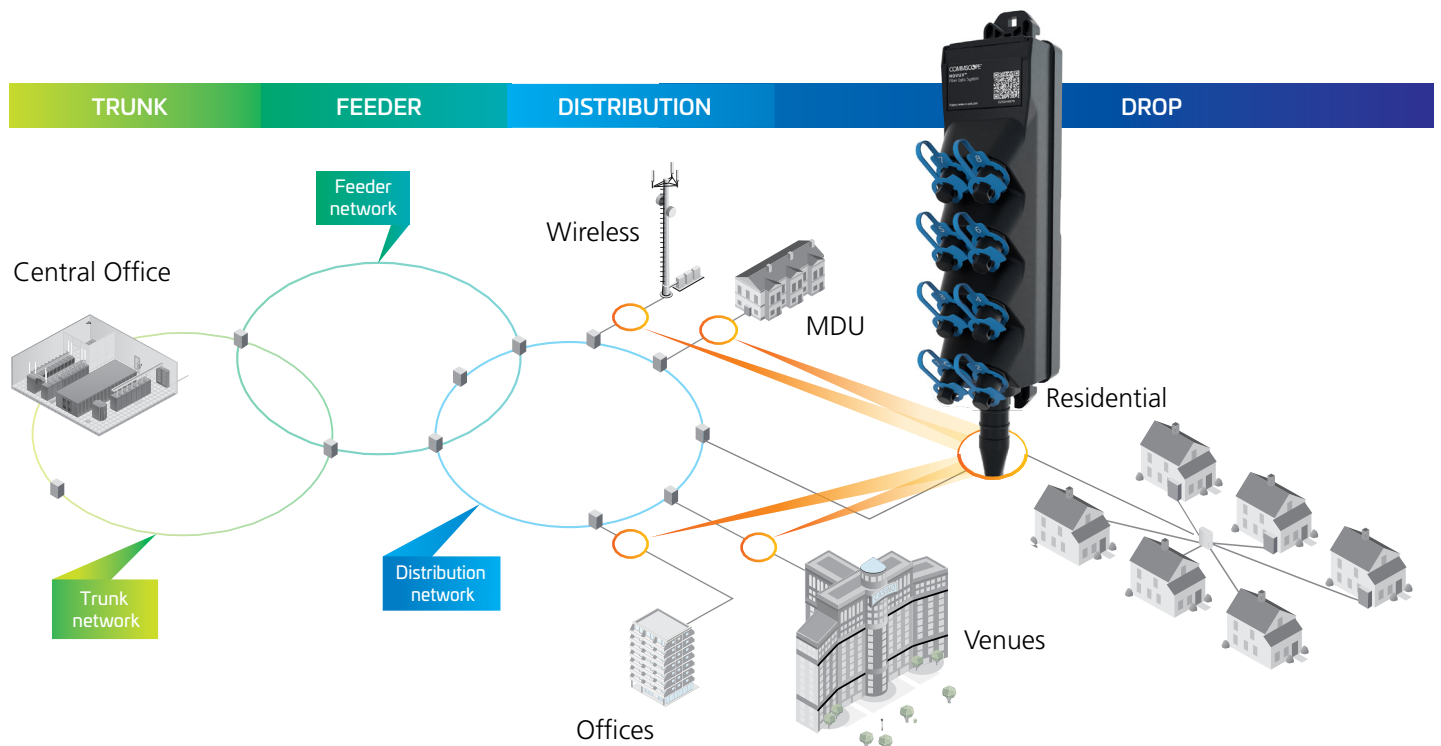

A complete FTTX ecosystem for all your network applications

Configurable, scalable, simple. Sounds like a tall order. That's where CommScope's new NOVUX hardened terminals come in. The modular design and innovative technology of our new terminals will help our provider partners keep pace with a rapidly changing network environment. Terminals are available with either full-size or Prodigy adapter ports.

NOVUX single-fiber terminals

- Ideal for single-family unit communities
- Up to 12 ports
- Point-to-point (P2P) or splitter configurations



NOVUX multi-fiber terminals

- Ideal for multi-fiber applications
- Up to 12 ports
- 2 to 12 fibers per port




NOVUX optical tap terminals

- Reduce deployment costs in rural or low-density applications
- Plug-and-play 2, 4, 8 drops



NOVUX fiber indexing terminals

- Leverage innovative fiber indexing for new builds
- 12 and 24 fibers

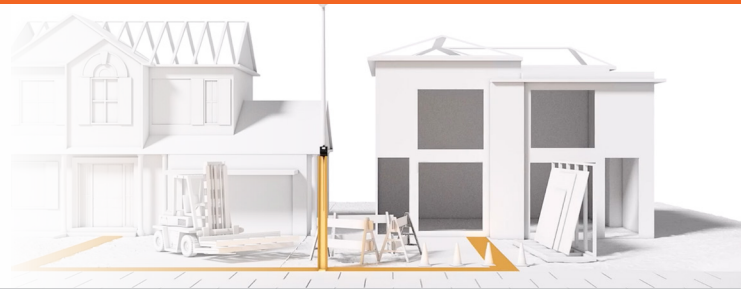





[Learn more about fiber indexing](#)

Each terminal in these applications is from the NOVUX HT Series. They're designed to adapt to your application—sharing connection capabilities, a unique product information system, a mounting platform, and customer configurability. While NOVUX hardened terminals are helping build your network, they're building your long-term profitability, because one terminal works for all your applications in all your deployments.

The ultimate flexibility for plug-and-play FTTH solutions

NOVUX hardened terminals are available in a variety of configurations with a choice of full-size or Prodigy adapters.

NOVUX hardened terminals				
				
NOVUX HT	Technologies available	Small	Medium	Large
HST Series	Single-fiber: P2P/no splitters	2 ports	6 ports	12 ports
		4 ports	8 ports	
	Single-fiber: P2P w/splitters	2 ports, 1x1:2	8 ports, 2x1:4	12 ports, 3x1:4
		4 ports, 1x1:4	8 ports, 1x1:8	
	Hybrid for multi-use		7 ports, 1x1:4 splitter, 3 P2P	12 ports, 1x1:8 splitter, 4 P2P
		4 ports, 1x1:2 splitter, 2 P2P	8 ports, 1x1:4 splitter, 4 P2P	11 ports, 2x1:4 splitter, 2 P2P, 1 HMFOC 4f
HMT Series	Multi-fiber	Up to 48f	Up to 96f	Up to 24f
		2 ports, each 2, 4, 6, 8, or 12f	6 ports, each 2, 3, or 4f	12 ports, each 2f
		3 ports, each 2, 4, 6, or 8f	8 ports, each 2, 3 or 12f	
		4 ports, each 2, 4, or 6f		
HTT Series	Optical taps	2 drops	4 drops	8 drops
HXT Series	Fiber indexing	12 fiber index only, 1f	12 fiber 1:4	12 fiber 1:8
		12 fiber index only, 2f	12f multi-use 2f + 1:4	12 fiber multi-use, 3f +1:4
		12 fiber index only, 3f	24f multi-use 2f	12 fiber multi-use, 4f +1:4
		12 fiber index only, 4f	24f multi-use 3f	12 fiber multi-use, 2f +1:8
		12 fiber multi-use, 2f	24f multi-use 4f	
		12 fiber branching, 2 to 6f per port		




On-demand configurations are available. Contact your CommScope representative to discuss your specific needs.

One platform. Any deployment. Choose your connectivity and cable option.

NOVUX hardened terminal configurations:

- Full-size single-fiber connector
- NOVUX Prodigy single-fiber connector
- HMFOC multi-fiber (2-12 fibers) connector
- Full-size jack or HMFOC jack in terminal front ports
- HMFOC or full-size plug on terminated stubs
- Stubless versions with either HMFOC (12f) or full-size jacks in cable port


[Go to CommScope fiber cables portfolio](#)

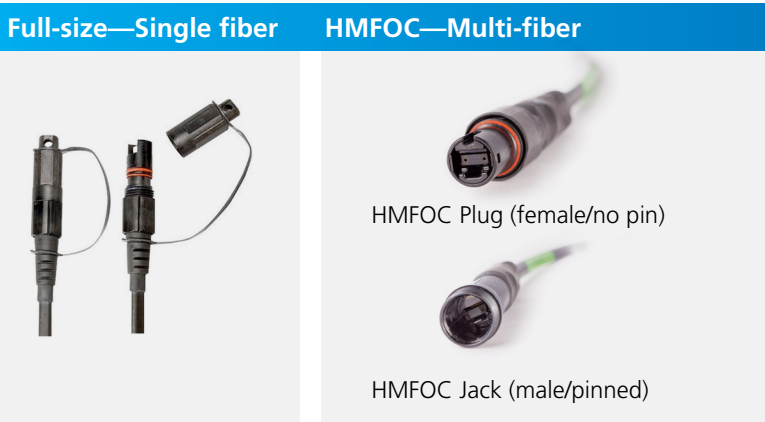

Terminal cable types	Cable sizes
Flat dielectric	8 mm W x 4.3 mm H
Flat toneable / locatable	10.1 mm W x 4.3 mm H
Round armored	8.0 cm (3.1")
Round dielectric	5 mm (capability up to 18 mm)


Ready for the field workforce of the future

Whatever the application, wherever you need to mount them, NOVUX hardened terminals are ready. The built-in mounting tabs and mounting strap features easy, direct mounting onto a strand, flat surface, pole, pedestal, or within a hand hole. Alternatively, to ease installation and maintenance, CommScope’s universal mounting bracket can be used in all mounting applications. With one common platform, installation across the series is easy and efficient and is backed by consistent documentation and training.

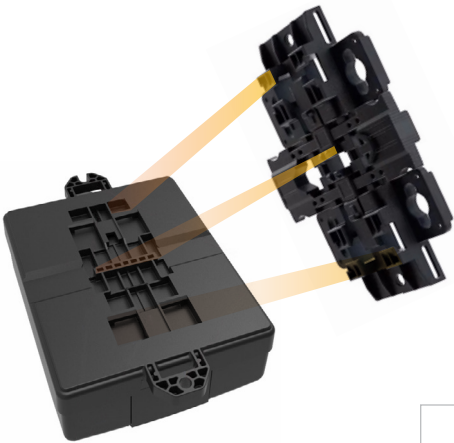

Universal mounting bracket* attaches to the built-in mounting features on the back of the terminal

* Ordered separately



A smart, universal solution

Featuring an innovative universal design, Prodigy fiber optic connectors and adapters are easy and fast to deploy while offering the performance you’ve come to expect from CommScope. With Prodigy, installers don’t need a patchwork of cable assemblies and components. The Prodigy connector is compatible in applications that require different styles of hardened fiber connectors—simplifying ordering and improving compatibility between network elements.

Unique universal compatibility

Full-size
converter kit




Bayonet
converter kit



DLX
converter kit




SC
converter kit



- Compact and small footprint, space-saving design for high-density environments
- Compatible with multiple hardened connectors
- Converter kit is preassembled for ease of installation

Safe. Worry-proof.

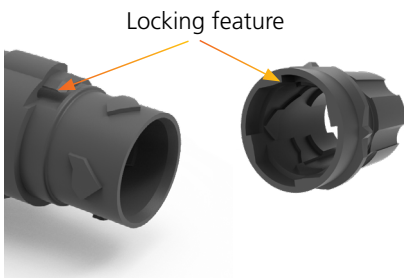

To ensure the highest level of safety in the field, our design development followed a poka-yoke—mistake-proofing—design philosophy to help eliminate errors.

- Connects easily with a 45-degree twist to lock the connector core in the adapter, converter and dust cap
- Self-locking mechanism with audible click enhances safety and provides peace of mind
- Prevents accidental release of the converter

Easy. Error-proof.


Keying feature
on the connector



Guiding surface
for self-alignment



“Breaking feature”



- Self-guided automatic alignment with wide working range simplifies adapter and converter installation and minimizes the chance of connection errors
- Innovative “break-free” design enables reuse of core connector in the event of field connection errors


Vision for the future—trusted expertise to get there

CommScope maintains deep and long-lasting relationships with customers and helps them build, design and deploy customized solutions that are aligned with their technology road maps. We always ask, “How can we better serve our customers and add value to their businesses?” Solving these challenges is what drives us every day.

We listened carefully to our customers with the development and innovation of the Prodigy connectors, creating breakthrough technology that revolutionizes cable assemblies. And we did it in two weeks—from concept to 3D prototypes for approval—accomplishing what no other company could. The new fiber drop cable assemblies with the Prodigy connector system take the simplicity of connectivity to the next level.

New fiber drop cable assembly with Prodigy

CommScope’s fiber drop cable assembly solutions bring speed and flexibility to outside plant fiber cabling networks. Each factory-connectorized cable is designed to eliminate time-consuming field splices. These plug-and-play solutions perform under extreme conditions, including sun, heat, cold, moisture and heavy RF interference. Durable and reliable, they integrate seamlessly into existing fiber optic networks.

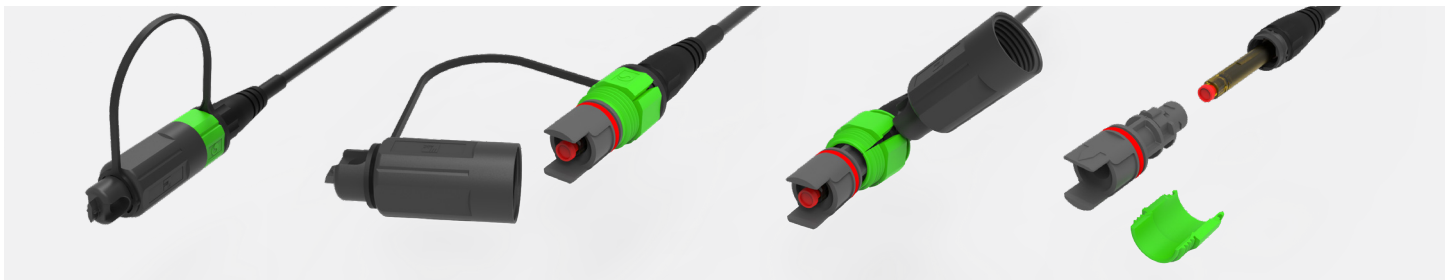


The Prodigy converter comes with a break-free feature. If an installer places the wrong converter on the cable assembly while in the field, the dust cap can be removed and used to break open the converter. By pressing down on a latch, the installer can release the converter body from the connector core, which can be reused.

Interoperable. Universal. Smart.

Prodigy simplifies field installation logistics and ordering for customers who use multiple types of hardened connectors and terminals. With Prodigy, customers need only one cable assembly that will include the required different lengths. An installer can simply run a drop cable assembly and convert the Prodigy connector to the required connector in the connection box. Customers have total freedom in using this universal cable solution.

Today, the fiber cable assembly is available with 5 mm round and figure 8 cables in lengths up to 2,000 feet (600 meters). In the future, additional fiber cables, such as flat drop dielectric and toneable, will be available. Please contact your CommScope representative for configuration availability.

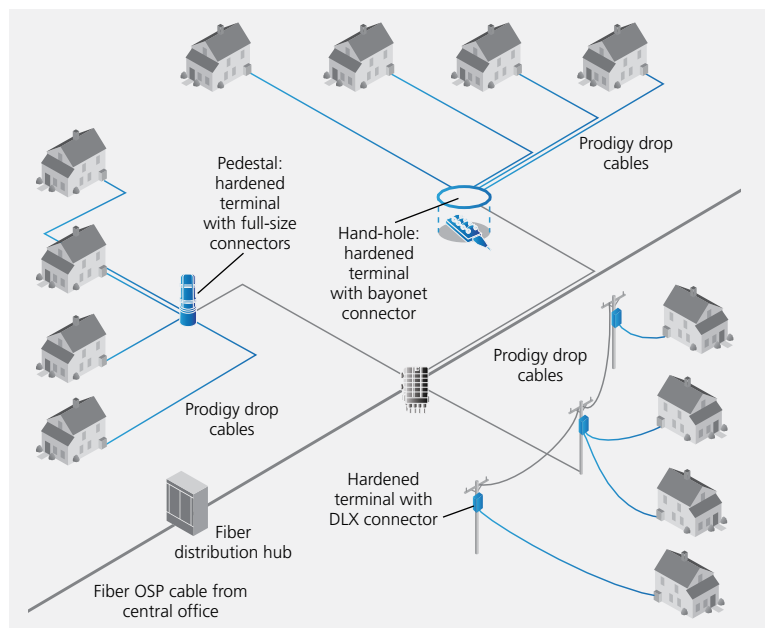

Unique network identification

One-click access to all product information

Each NOVUX hardened terminal comes with a QR code that allows field installers to access CommScope's cTrak app. With one click, cTrak provides a wealth of product information, specifications, installation instructions, videos, schematics, and test results.

NOVUX—built for you

You work hard to give your customers the best network connectivity. Why should your terminals look the same as those of other providers? NOVUX hardened terminals offer an optional customer-configurable ID plate, for ease of network record-keeping, and clarity for multiple operators that share locations.

[See how cTRAK works](#)[Download cTRAK app](#)

YOUR
LOGO



Investing in the planet

CommScope designed NOVUX using sustainable practices for packaging, labeling and installation, helping customers meet their own corporate sustainability goals.

All components come in compact, convenient packaging for optimal environmental benefit and minimize single-use plastic.



NOVUX hardened terminals, single-fiber

HST- H

Housing color

B	Black, RAL 9005
G	Gray, RAL 7035

Number of ports

2	2 port
3	3 port
4	4 port
5	5 port
6	6 port
8	8 port
9	9 port
A	10 port
B	11 port
C	12 port

Adapter type

A	NOVUX Prodigy
H	Full-size

Configuration standard

N	No splitter
A	1:2 splitter
B	1:4 splitter
C	1:8 splitter
D	2x 1:4 splitter
E	3x 1:4 splitter
F	1:2 splitter + 2P2P
G	1:4 splitter + 3P2P
H	1:4 splitter + 4P2P
J	1:8 splitter + 4P2P
K	2x 1:4 splitter + 2P2P + 4f HMFOC

Cable type*

A	Flat dielectric
B	Flat toneable
C	Round armored
G	Round dielectric
O	Stubless

Cable length

0000	0 ft, 0 m
0010	10 ft, 3 m
0020	20 ft, 6 m
0030	30 ft, 9 m
0033	33 ft, 10 m
0050	50 ft, 15 m
0066	66 ft, 20 m
0100	100 ft, 30 m
0150	150 ft, 45 m
0165	165 ft, 50 m
0200	200 ft, 60 m
0250	250 ft, 76 m
0300	300 ft, 91 m
0330	330 ft, 100 m
0350	350 ft, 106 m
0400	400 ft, 121 m
0450	450 ft, 137 m
0500	500 ft, 152 m
0550	550 ft, 167 m
0600	600 ft, 182 m
0650	650 ft, 198 m
0700	700 ft, 213 m
0725	725 ft, 220 m
0750	750 ft, 228 m
0800	800 ft, 243 m
0821	821 ft, 250 m
0850	850 ft, 259 m
0900	900 ft, 274 m
0985	985 ft, 300 m
1000	1000 ft, 304 m
1100	1100 ft, 335 m
1150	1150 ft, 350 m
1200	1200 ft, 365 m
1250	1250 ft, 381 m
1300	1300 ft, 396 m
1400	1400 ft, 426 m
1500	1500 ft, 457 m
1600	1600 ft, 487 m
1642	1642 ft, 500 m
1700	1700 ft, 518 m
1750	1750 ft, 533 m
2000	2000 ft, 609 m

Customization

000	Standard (stub first)
001	Reverse spool (terminal first)
002	Plastic spool (stub first)
003	Plastic spool (terminal first)

Accessories

N	No accessories
U	Universal mounting bracket
S	Strand bracket
P	Cable mounting bracket

Stub end


N	Splice stub
H	Full-size
A	Prodigy
F	HMFOC plug (female/no pin) 20 ft minimum length

* 0-300 foot lengths of cable are coiled (option 000); for lengths greater than 300 feet, choose preferred option




Contact your CommScope representative for configuration availability.

NOVUX hardened terminals, multi-fiber

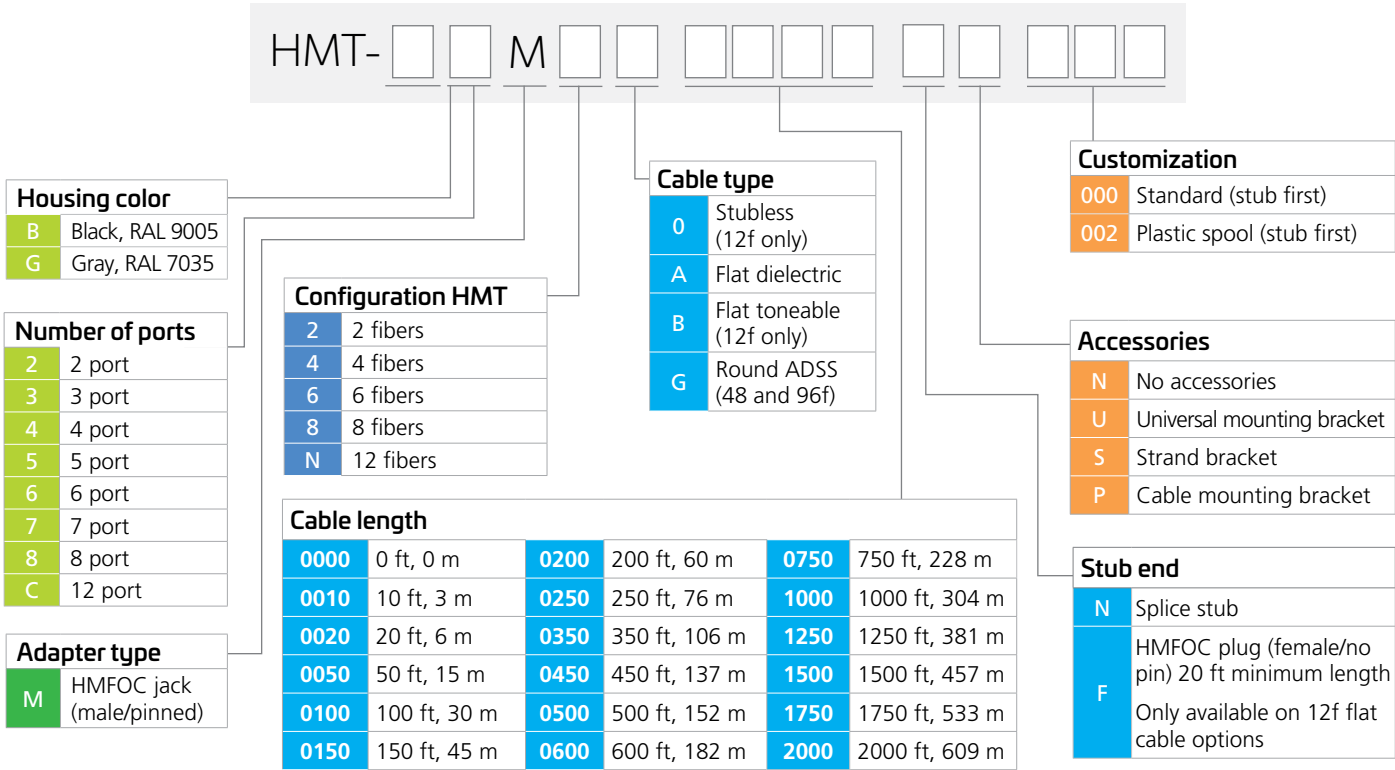

NOVUX hardened terminals with optical taps

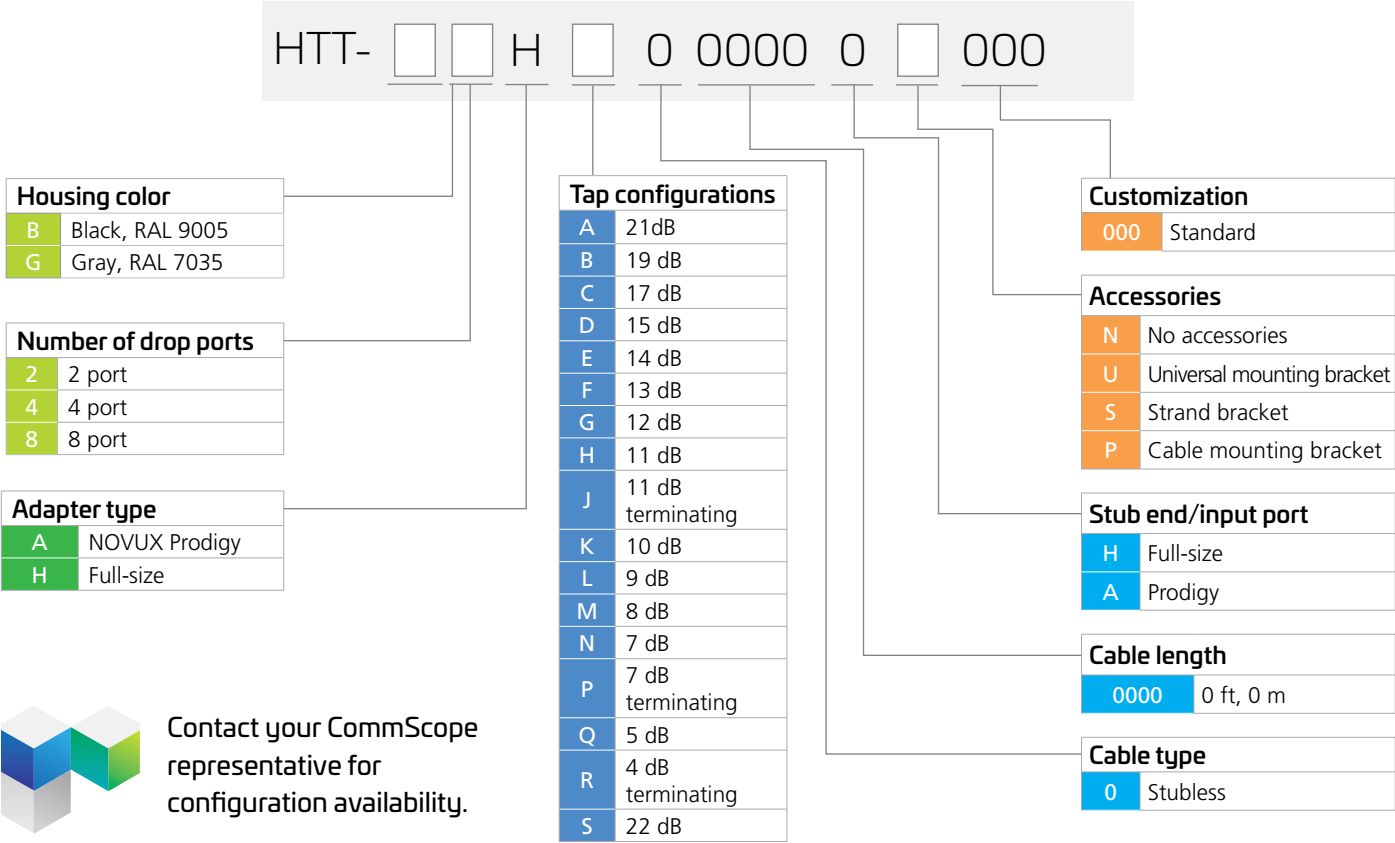

Contact your CommScope representative for configuration availability.

NOVUX hardened terminals with fiber indexing



Contact your CommScope representative for configuration availability.

Ordering information—accessories

Catalog No.	Description	MOQ
NVX-UMB-NN-SS-BK	Universal mounting bracket small—small actuator (handle)	1
NVX-UMB-NN-SM-BK	Universal mounting bracket small—medium actuator (handle)	1
NVX-CMB-NN-UV-BK	Cable mounting bracket	1
NVX-SMB-FD-NN-NN	Strand mounting bracket	1
NVX-PED-DB-NN-NN	Pedestal D bar mounting kit	1



FHD single-fiber assemblies

- Full range of drop cables available
- Available in flat dielectric and flat toneable, 5 mm round cables
- Available with one or both ends connectorized
- Variety of lengths available
- NOVUX Prodigy drops

[Go to the FHD single-fiber drop cables](#)



MHD multi-fiber assemblies

- Full range of drop cables available
- Available in flat dielectric and flat toneable
- Available with one or both ends connectorized
- Plug—female, no pin
- Jack—male, pinned
- Variety of lengths available

[Go to the MHD multi-fiber drop cables](#)



NOVUX Prodigy single-fiber assemblies

- Full range of drop cables and converters available
- Available in EZ AXS dielectric, EZ AXS toneable, flat dielectric and flat toneable, 5 mm round cables
- Available with one or both ends connectorized with Prodigy core and converters either included or attached
- Variety of lengths available

[Go to the NOVUX Prodigy single-fiber drop cables](#)



A new way
for what's next.

CommScope pushes the boundaries of communications technology with game-changing ideas and ground-breaking discoveries that spark profound human achievement. We collaborate with our customers and partners to design, create and build the world's most advanced networks. It is our passion and commitment to identify the next opportunity and realize a better tomorrow. Discover more at commscope.com



commscope.com

Visit our website or contact your local CommScope representative for more information.

© 2023 CommScope, Inc. All rights reserved.

CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to CommScope products or services. CommScope is committed to the highest standards of business integrity and environmental sustainability with a number of CommScope's facilities across the globe certified in accordance with international standards, including ISO 9001, TL 9000, and ISO 14001. Further information regarding CommScope's commitment can be found at www.commscope.com/About-Us/Corporate-Responsibility-and-Sustainability.